



SUBMITTAL

**HBT-SERIES**  
HOT WATER BUFFER TANK

**Models:** HBT-120 thru HBT-300  
**Submittal Sheet No.** HBT-2016B

Date: 4/20

Job Name _____	Submitted By _____	Date _____
Location _____	Approved By _____	Date _____
_____	Order No. _____	Date _____
Engineer _____	Notes _____	
Contractor _____	_____	
Sales Rep. _____	_____	

**Description**


AA tanks ASME 4-port primary-secondary Hot Water Buffer Tanks (HBT) are designed for use with today's high efficiency systems that incorporate small modular low-mass boilers. These small volume systems require additional "buffer" capacity for the systems to eliminate problems such as excessive boiler cycling, poor temperature control, and erratic system operation. The properly sized HBT adds necessary thermal mass to the system to dampen fast transitions and minimize boiler cycling that occurs during zero or low domestic load conditions.

**Construction**

Shell: Carbon Steel  
(Available in 304 / 316 Stainless Steel)  
Exterior: Primer Painted

**Performance Limitations**

Maximum Design Temperature: 450°F  
Maximum Design Pressure: 125 PSIG\*  
\*200 & 250 PSIG available

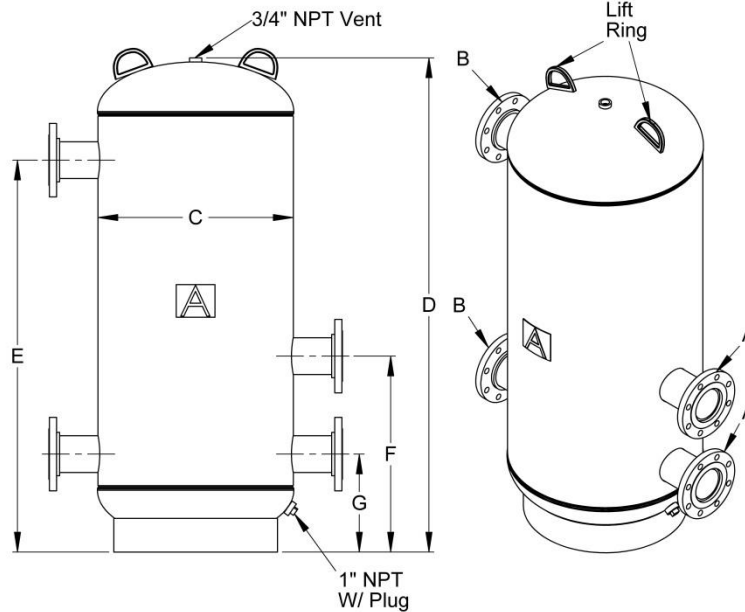

HBT-120 thru HBT-300

**Typical Specification**

Furnish and install, as shown on plans, a HBT-\_\_\_\_\_ as manufactured by AA tanks Company. The system water connections must be \_\_\_\_\_" (NPT/flanged/grooved). The HBT must be constructed in accordance with the most recent addendum of Section VIII Division 1 of the ASME Boiler and Pressure Vessel Code and constructed and stamped for 125 PSI working pressure @ 450°F.

Each tank shall be AA tanks model number HBT-\_\_\_\_\_ or approved equal.

25110 THOMAS DR • WARREN, MI 48091 • (586) 427-7700 • (586) 427-7895 FAX • www.aatanks.com



Model Number	Part Number	Tank Volume (Gallons)	Tagging Information	Quantity
HBT-120-		120		
HBT-210-		210		
HBT-300-		300		

### Dimensions & Weights

Model Number	Part Number	Tank Volume (Gallons)	Dimensions In Inches							Max. Shipping Wt (lbs)	
			A	B	C	D	E	F	G		
HBT-120-22	55641222	120	2	2	24	60	48	24	12	206	
HBT-210-22	55642122	210			30	76 1/2	58	28	14	408	
HBT-300-22	55643022	300			36	72	56	32	16	739	
HBT-120-23	55641223	120		3	3	24	60	48	24	12	228
HBT-210-23	55642123	210				30	76 1/2	58	28	14	426
HBT-300-23	55643023	300				36	72	56	32	16	759
HBT-120-24	55641224	120		4	4	24	60	48	24	12	235
HBT-210-24	55642124	210				30	76 1/2	58	28	14	435
HBT-300-24	55643024	300				36	72	56	32	16	768
HBT-120-26	55641226	120		6	6	24	60	48	24	12	254
HBT-210-26	55642126	210				30	76 1/2	58	28	14	454
HBT-300-26	55643026	300				36	72	56	32	16	787
HBT-120-34	55641234	120	3	4	24	60	48	24	12	255	
HBT-210-34	55642134	210			30	76 1/2	58	28	14	455	
HBT-300-34	55643034	300			36	72	56	32	16	788	
HBT-120-36	55641236	120		6	6	24	60	48	24	12	274
HBT-210-36	55642136	210				30	76 1/2	58	28	14	574
HBT-300-36	55643036	300				36	72	56	32	16	807
HBT-120-33	55641233	120		3	3	24	60	48	24	12	246
HBT-210-33	55642133	210				30	76 1/2	58	28	14	546
HBT-300-33	55643033	300				36	72	56	32	16	779
HBT-120-44	55641244	120		4	4	24	60	48	24	12	264
HBT-210-44	55642144	210				30	76 1/2	58	28	14	564
HBT-300-44	55643044	300				36	72	56	32	16	797
HBT-120-46	55641246	120	6		6	24	60	48	24	12	283
HBT-210-46	55642146	210				30	76 1/2	58	28	14	583
HBT-300-46	55643046	300				36	72	56	32	16	816

#### Notes:

- Insulation available.
- Manway optional.